





RENTALITE
Groot Tegeler 9a
7535 EB Enschede
The Netherlands
Tel: +31(0)53 755333
Web: www.rentalite.com
Mail: info@rentalite.com

Rentalite PPL INNOVATION

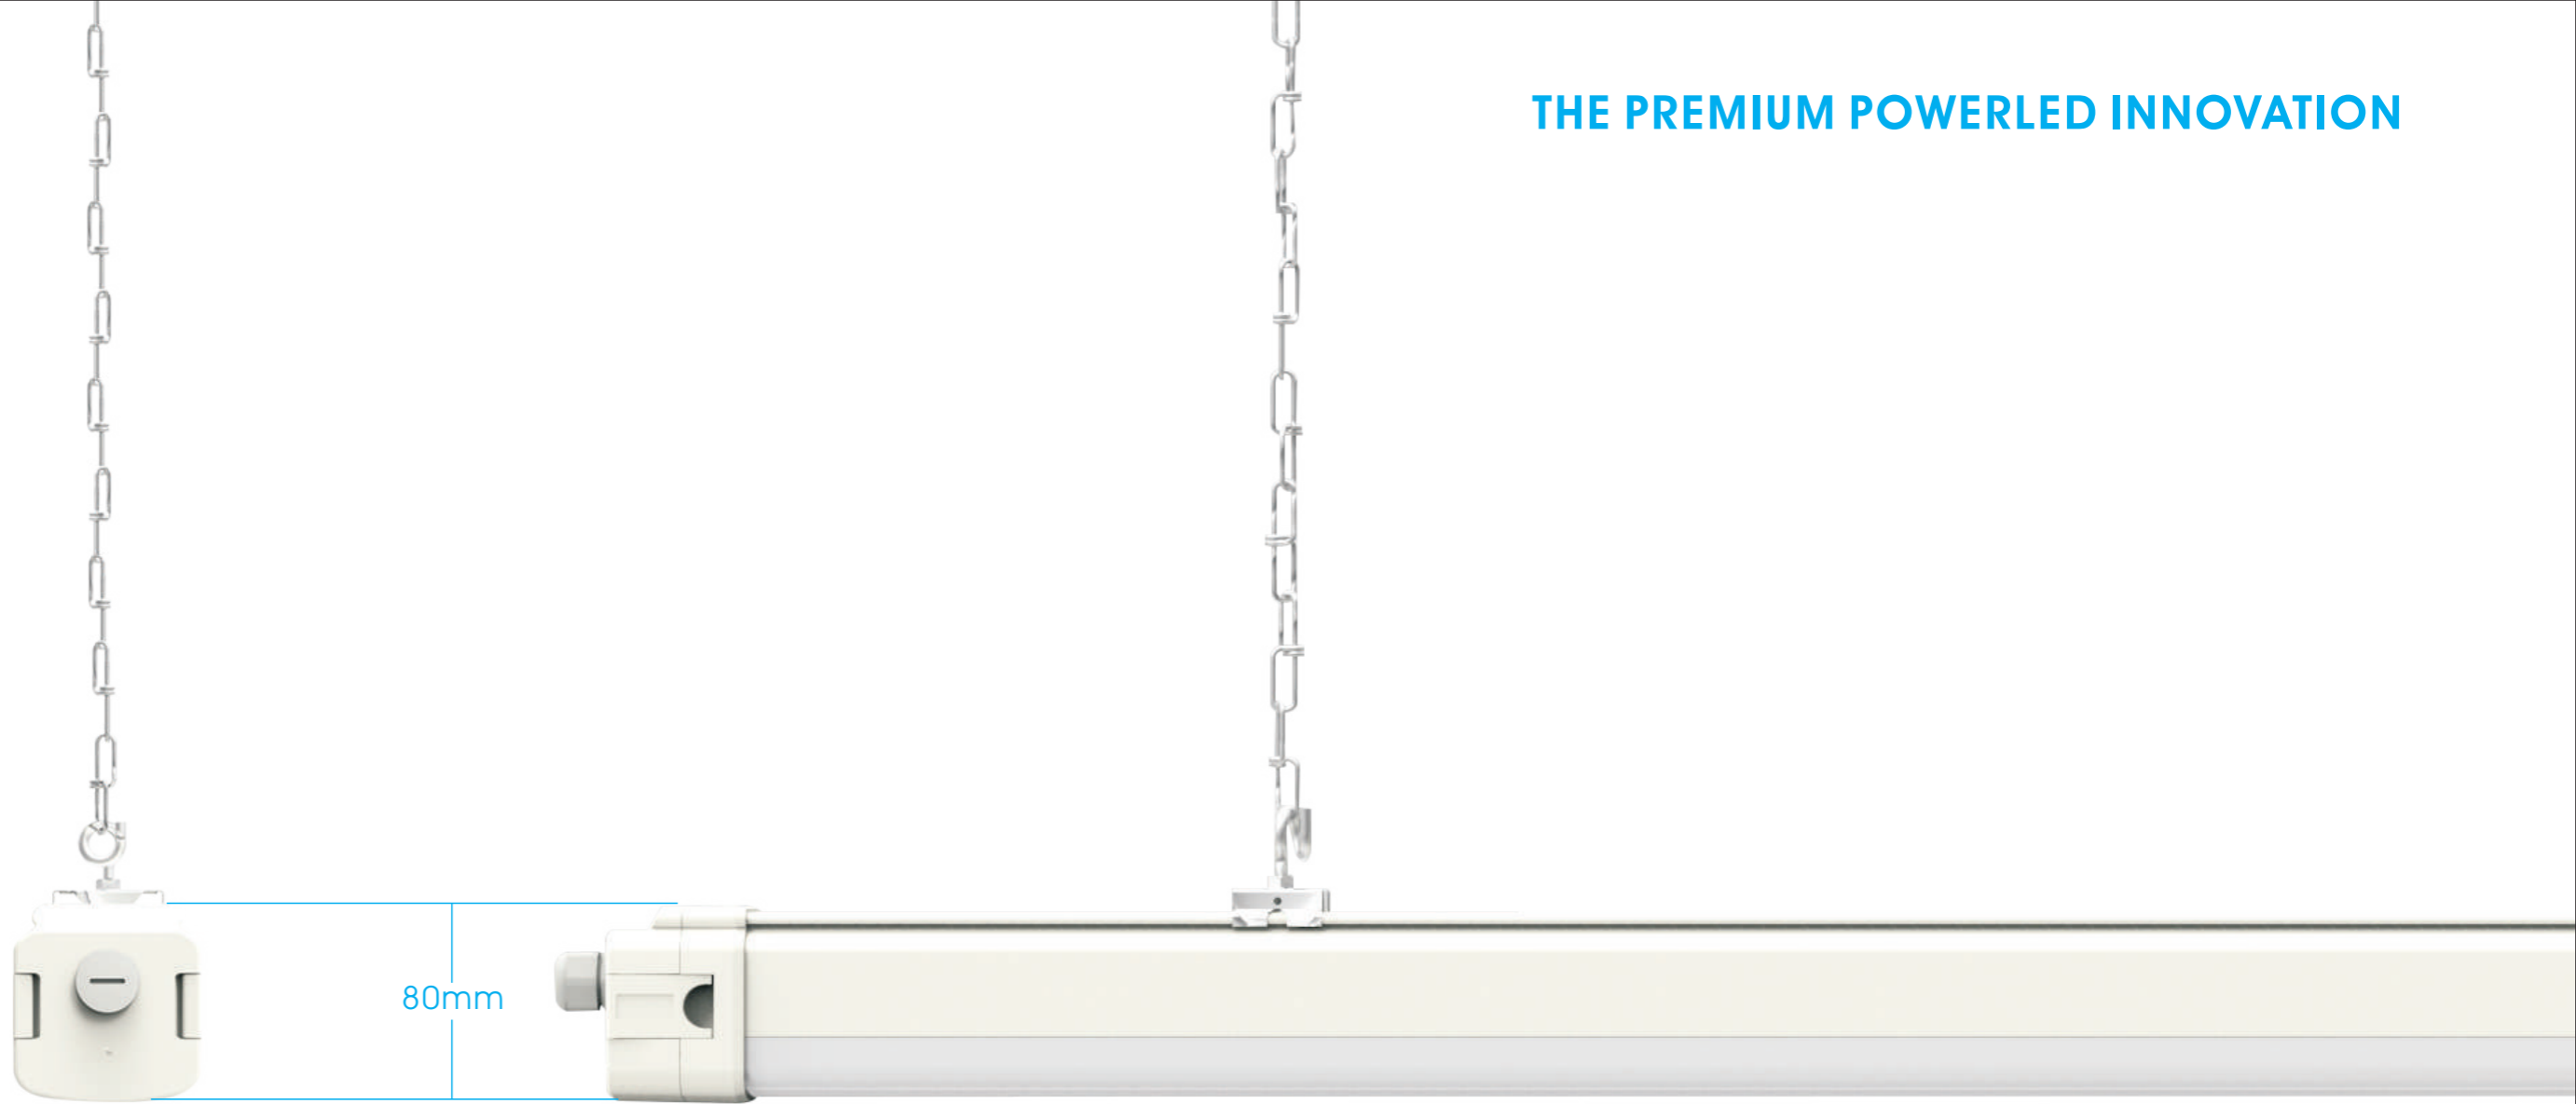

ALL-IN-ONE INNOVATION

- VARIOUS ADJUSTABLE WATTAGES
- VARIOUS BEAMANGLE OPTIONS
- VARIOUS INDUSTRIAL OPTIONS
- TOOLFREE INSTALLATION
- IK10,IP65,ROHS,CE,TÜV CERTIFIED
- DIMMING.BATTERY.SENSOR.ENEC DRIVER.OPTIONAL

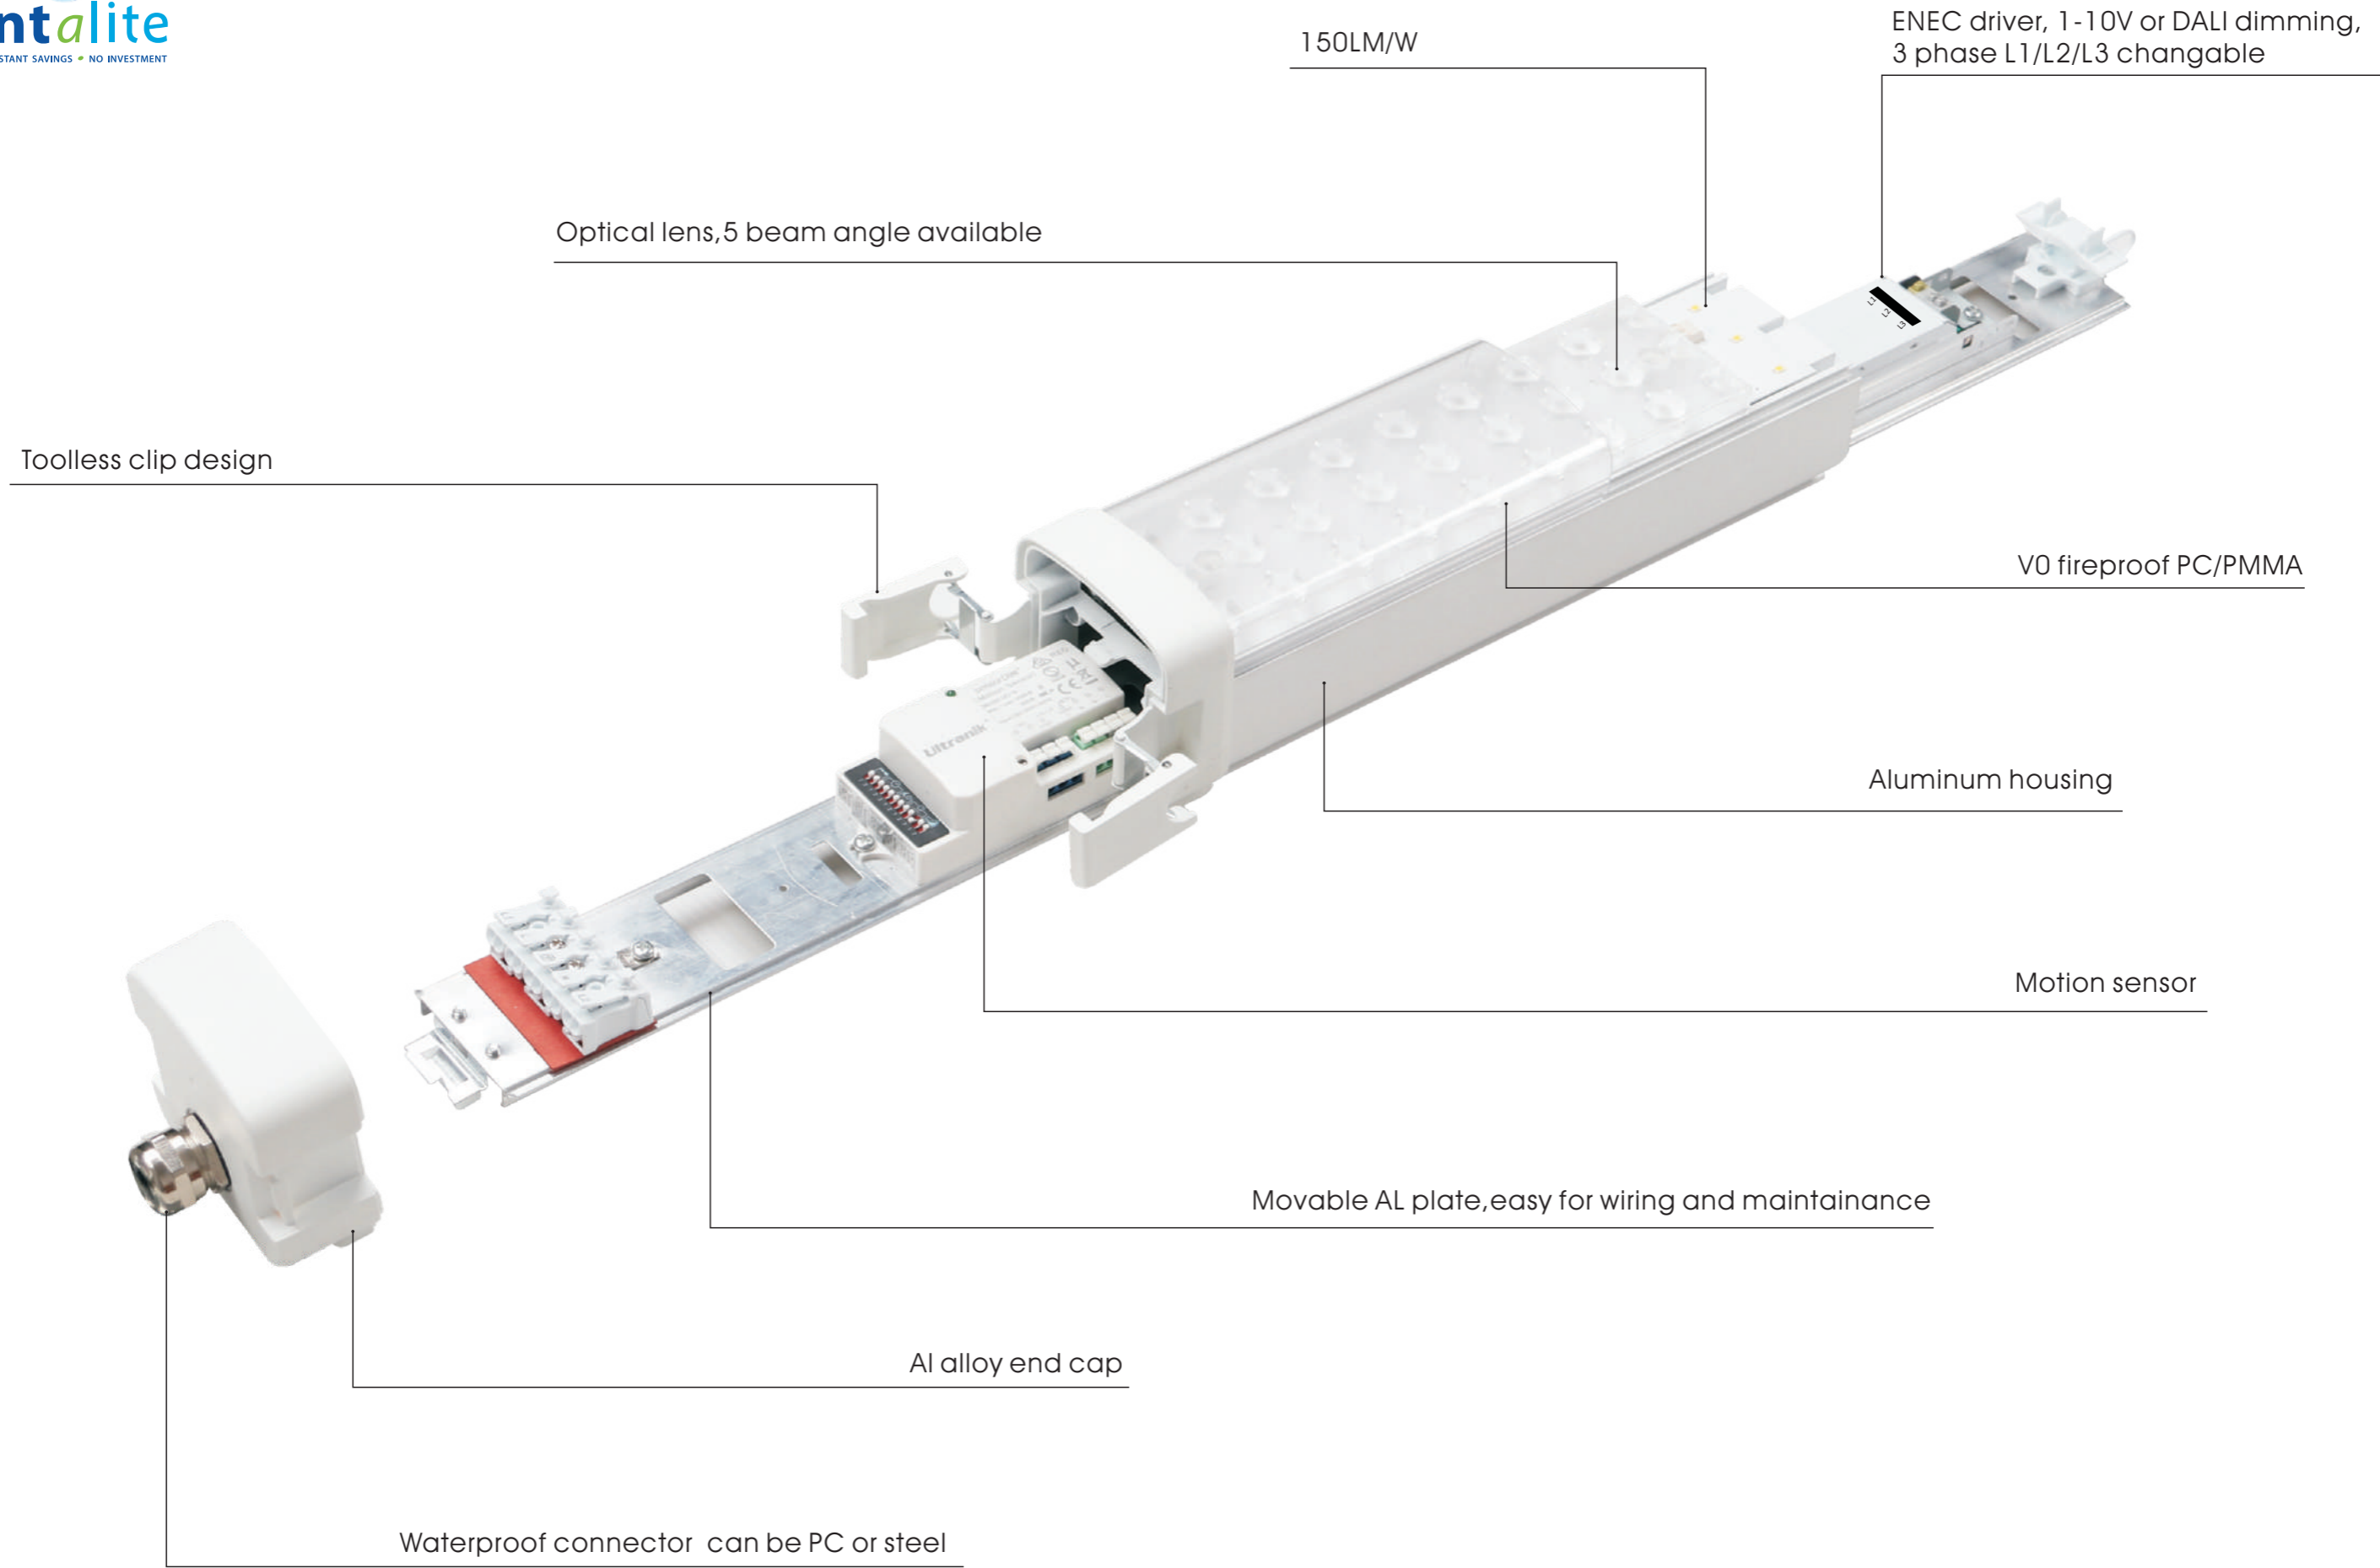













OPTICAL LENS AND DIFFUSER DESIGN




6 different beam angles enable the light to be installed at the place as high as 20 meters

INNOVATIVE DESIGN ON OPTICS

Optical lens integrated, the light can be used at different height, meeting lux requirement for various applications

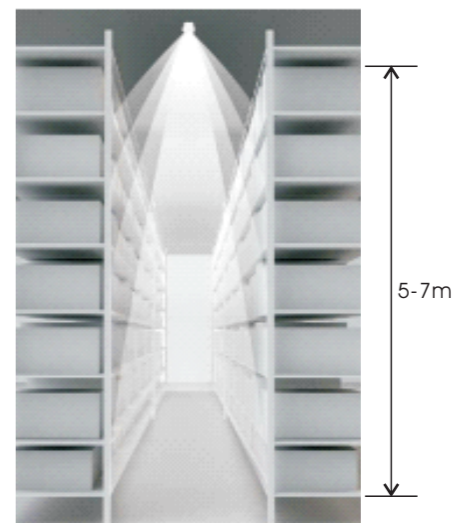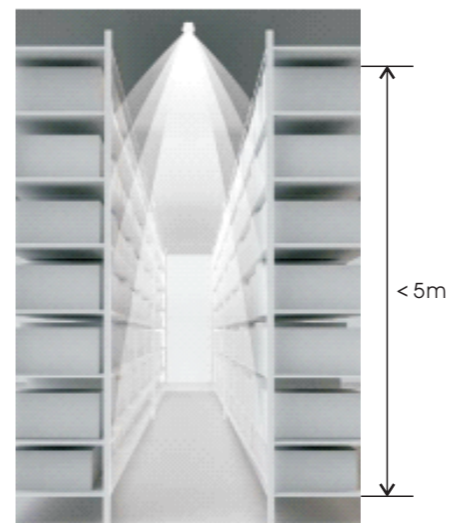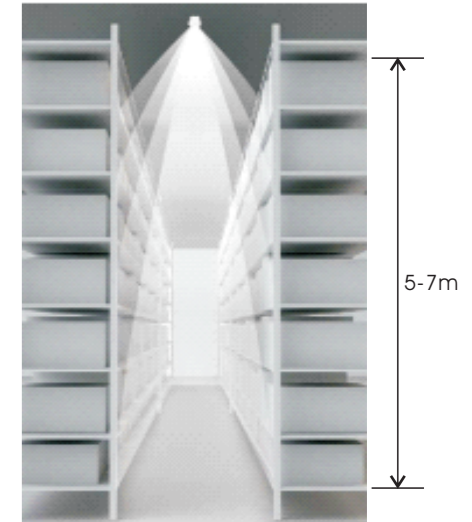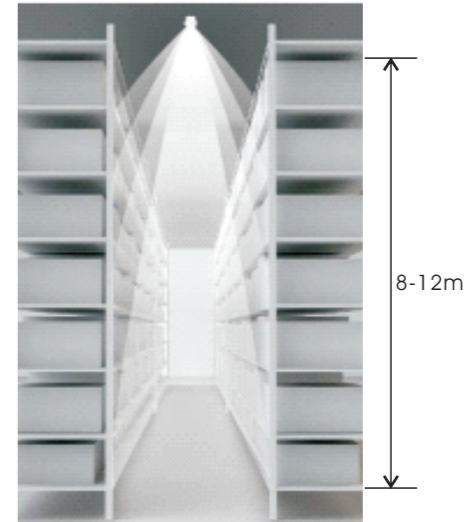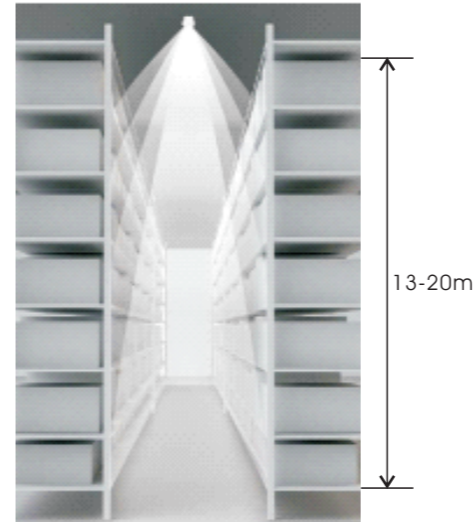

Optics

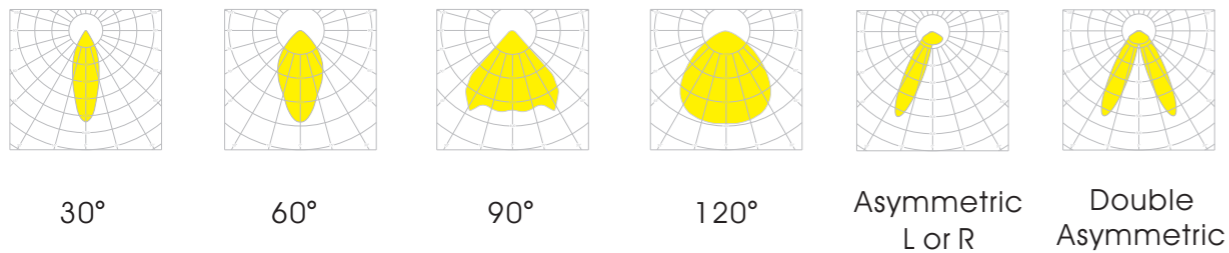




CONTINUOUS CONNECTION WITH 3/5 WIRES AC CABLE


TOOLLESS INSTALLATION


The end cap at both ends of the light can be opened for wiring joint without any tool by the innovative clip design.

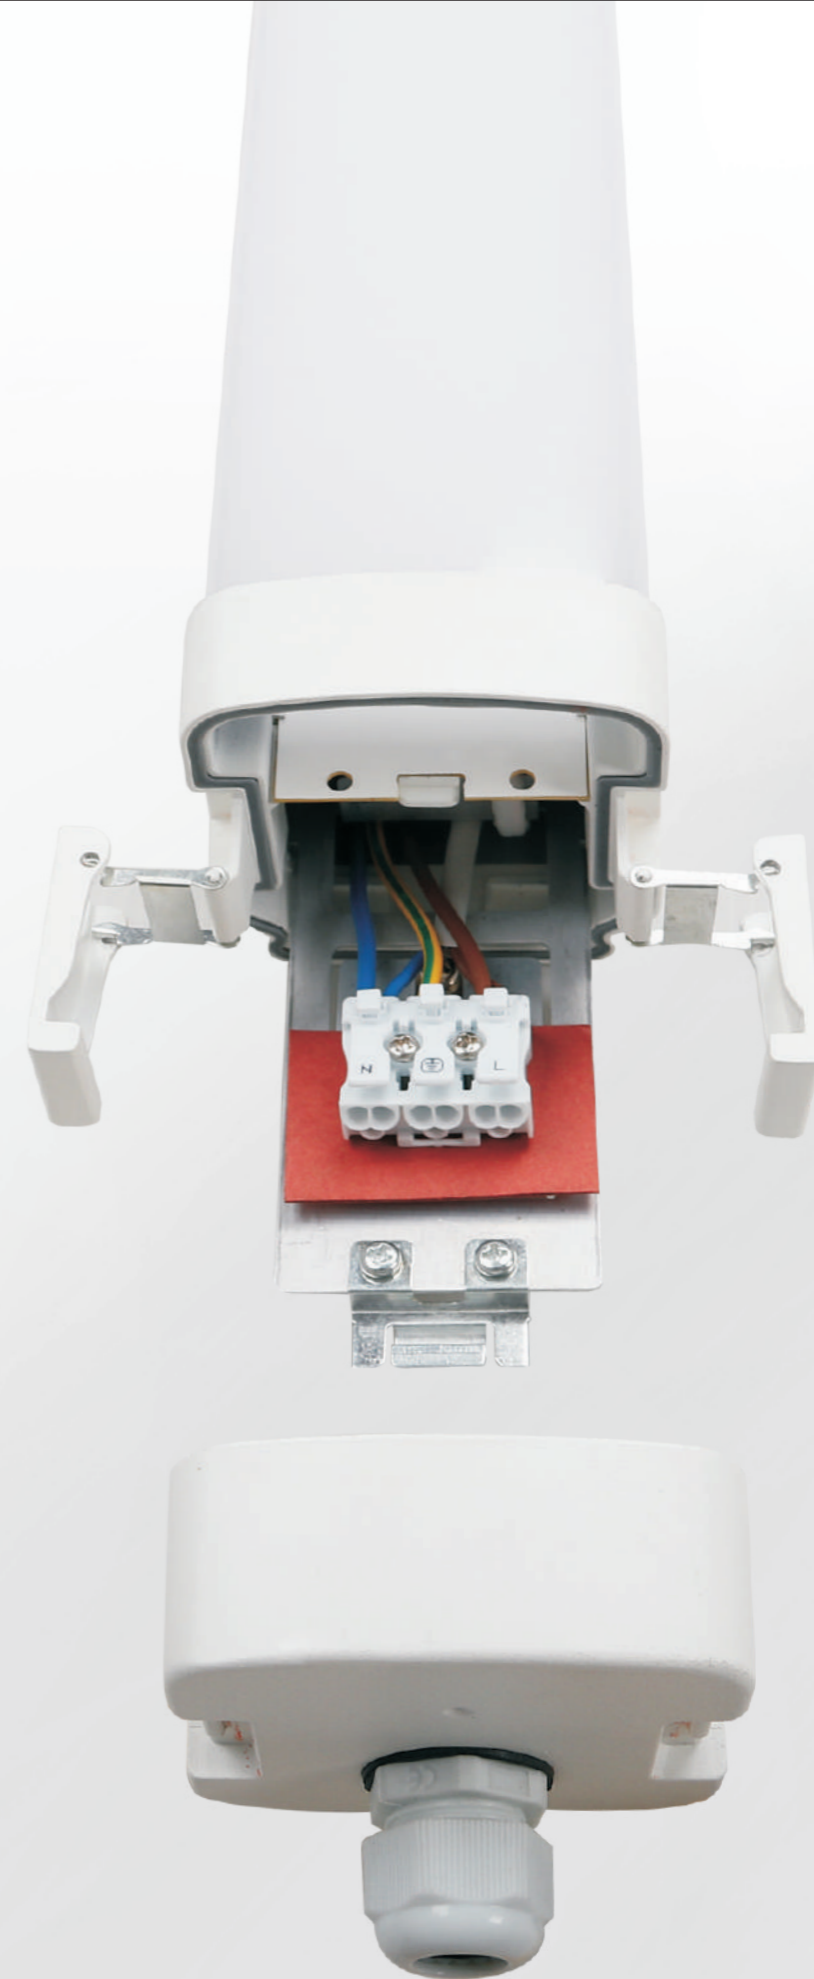

PCB REPLACEABLE

The PCB can be replaced very easily without any tool.

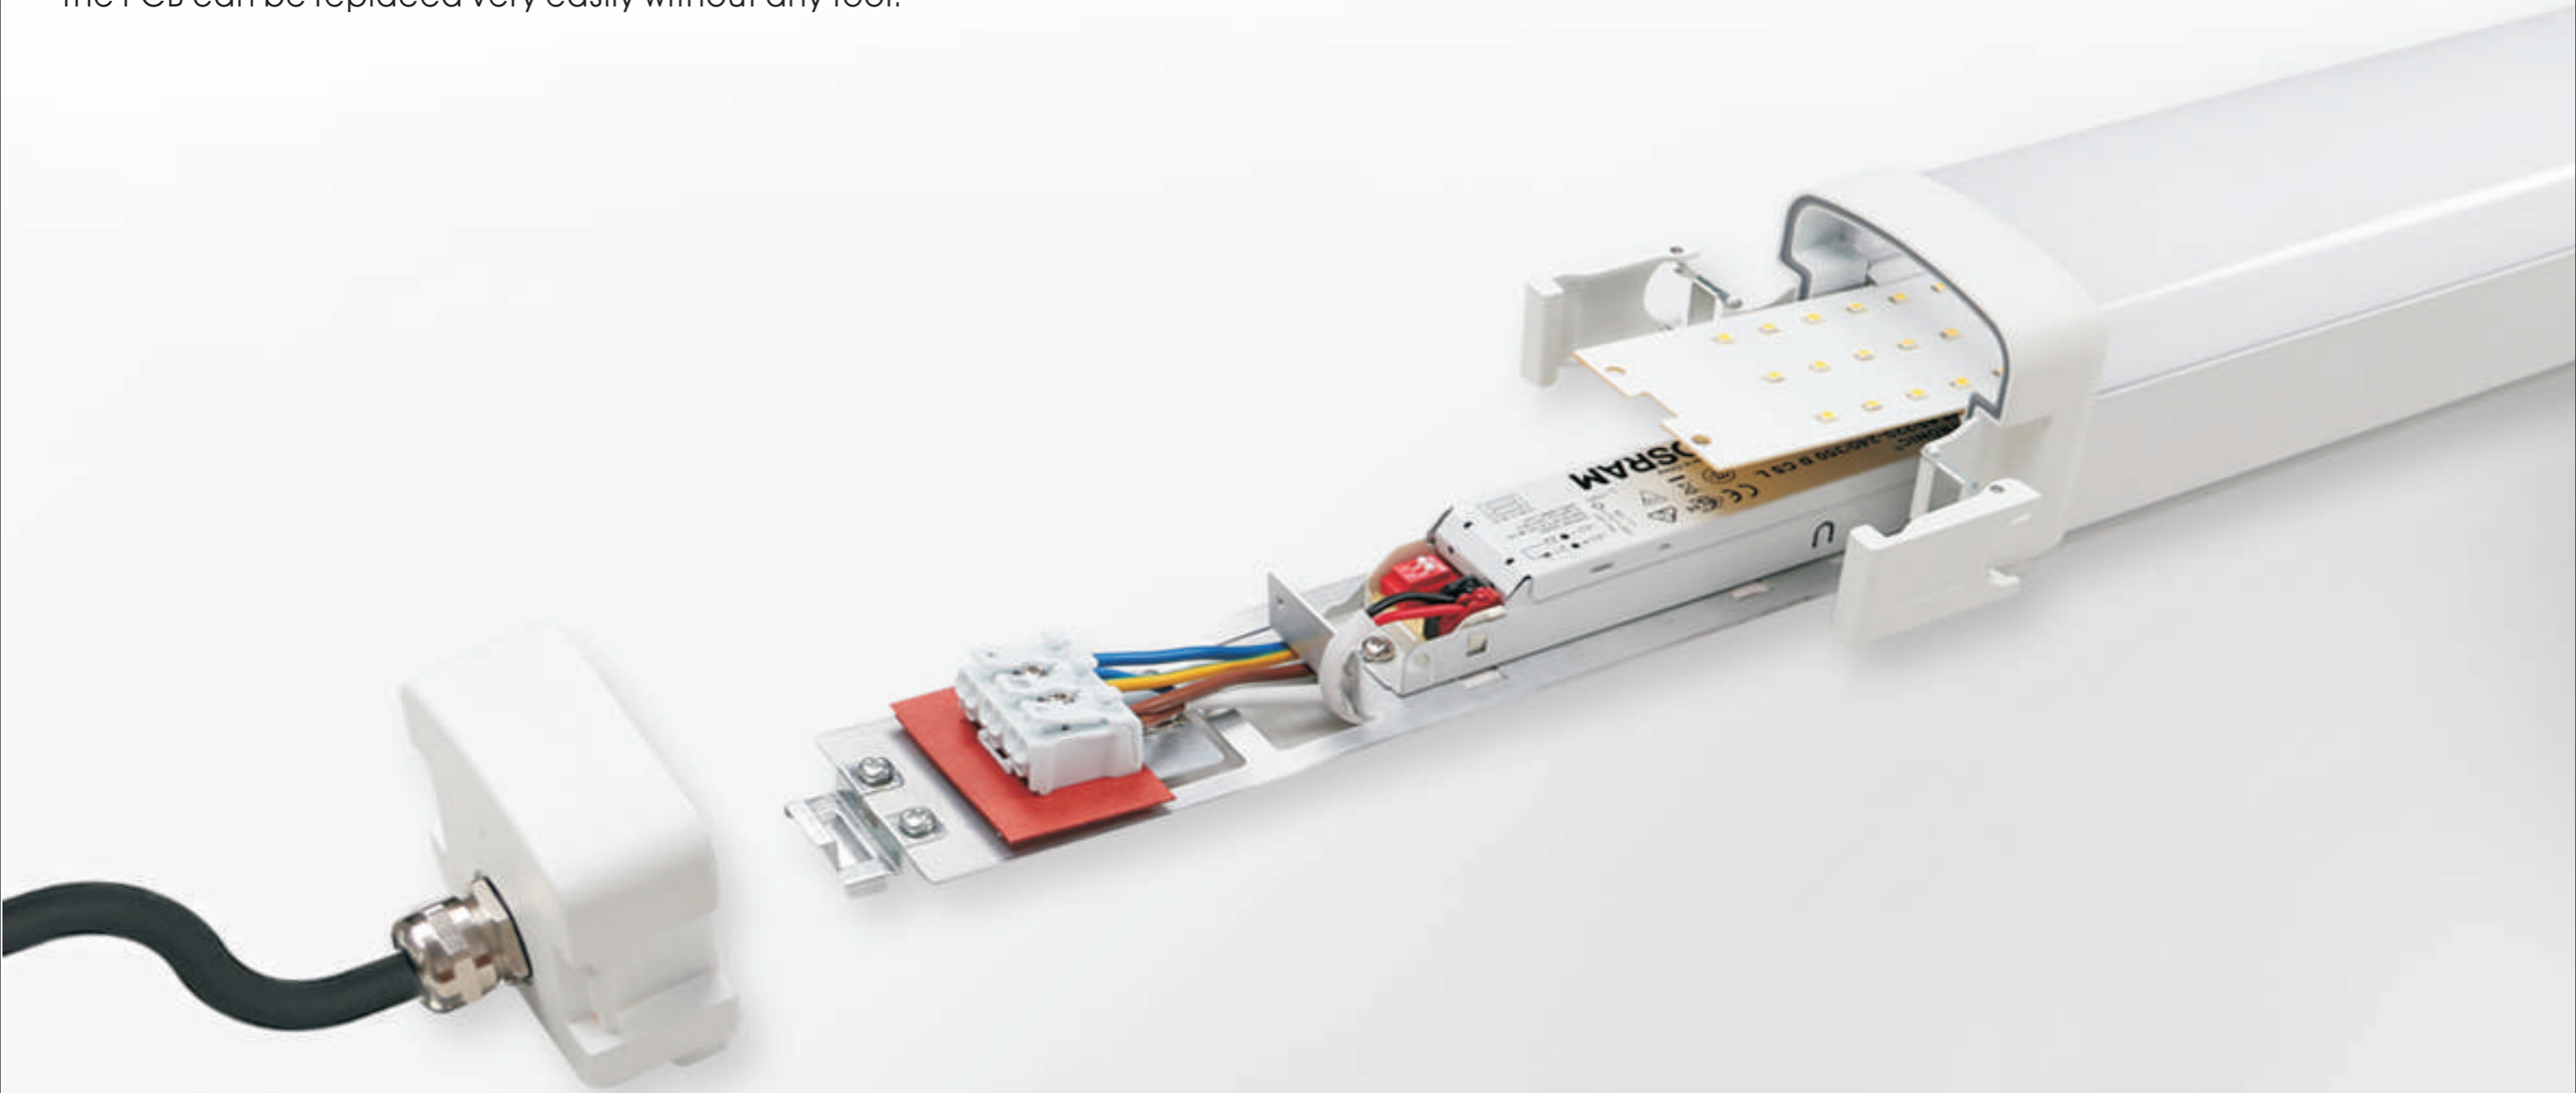



1-10V Dimmable/
DALI Dimmable




Emergency



Motion Sensor

POWER ADJUSTABLE BY DIP SWITCH DESIGN

3 PHASE L1/L2/L3 CHANGABLE ON THE DRIVER

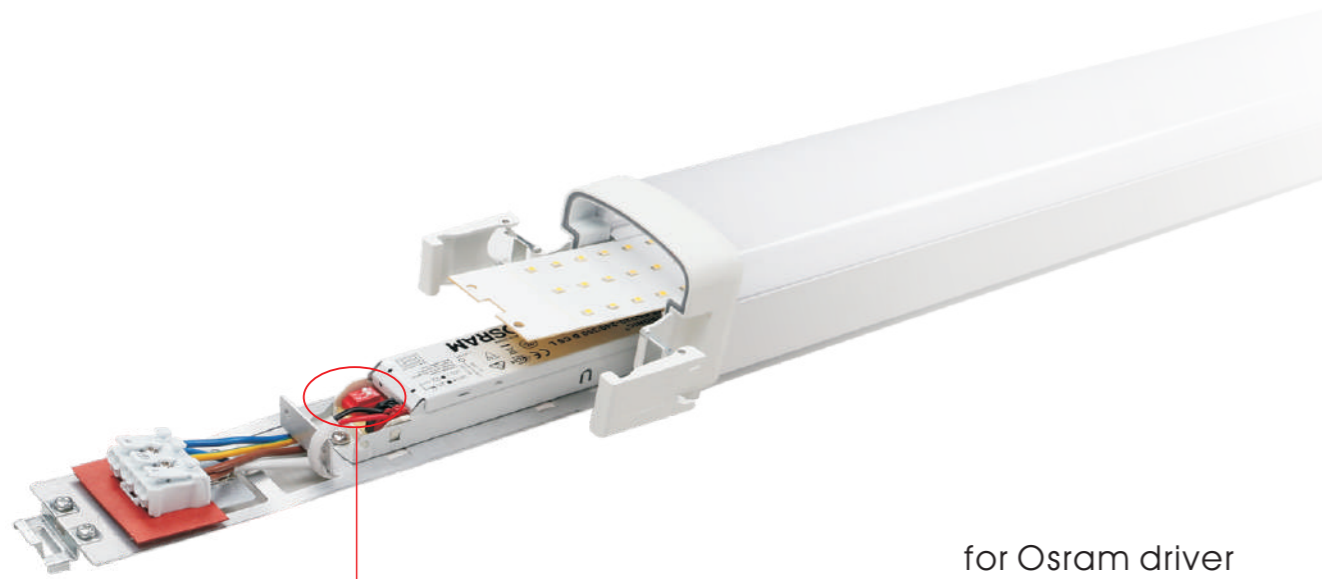

for Osram driver

PI	1	2
58W	—	—
50W	—	ON
42W	ON	—
33W	ON	ON

for 75W driver

PI	1	2	3
75W	—	—	—
65W	ON	—	—
55W	—	ON	—
45W	ON	ON	—
40W	—	—	ON
35W	ON	—	ON
30W	—	ON	ON
25W	ON	ON	ON






75W driver


Various power options. It's extremely easy to select the power range by setting the DIP switch



PARAMETER

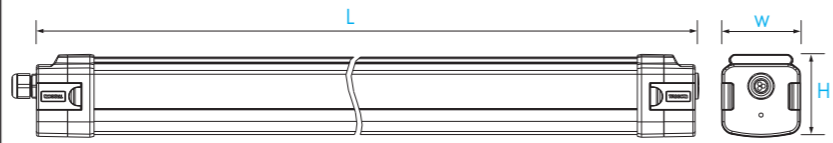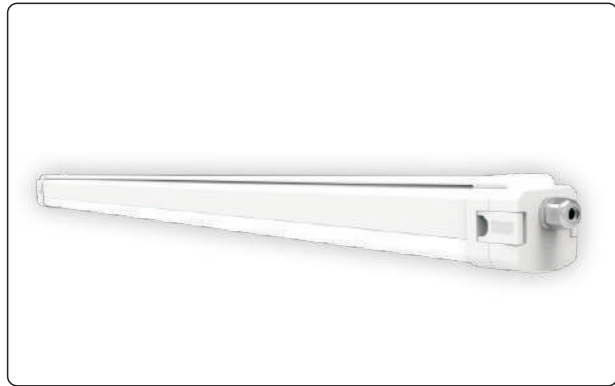



Model	Size	Power	Beam angle	Lumen efficiency	L	W	H
T06A32P/D/E/MS 30	0.6m	12-32W	30°	150lm/w	683	76	80
T06A62P/D/E/MS 30	1.2m	21-62W	30°	150lm/w	1253	76	80
T06A47P/D/E/MS 30	1.2m	27-47W	30°	150lm/w	1253	76	80
T06A75P/D/E/MS 30	1.5m	25-75W	30°	150lm/w	1540	76	80
T06A58P/D/E/MS 30	1.5m	33-58W	30°	150lm/w	1540	76	80




Model	Size	Power	Beam angle	Lumen efficiency	L	W	H
T06A32P/D/E/MS 60	0.6m	12-32W	60°	150lm/w	683	76	80
T06A62P/D/E/MS 60	1.2m	21-62W	60°	150lm/w	1253	76	80
T06A47P/D/E/MS 60	1.2m	27-47W	60°	150lm/w	1253	76	80
T06A75P/D/E/MS 60	1.5m	25-75W	60°	150lm/w	1540	76	80
T06A58P/D/E/MS 60	1.5m	33-58W	60°	150lm/w	1540	76	80



Model	Size	Power	Beam angle	Lumen efficiency	L	W	H
T06A32P/D/E/MS 90	0.6m	12-32W	90°	150lm/w	683	76	80
T06A62P/D/E/MS 90	1.2m	21-62W	90°	150lm/w	1253	76	80
T06A47P/D/E/MS 90	1.2m	27-47W	90°	150lm/w	1253	76	80
T06A75P/D/E/MS 90	1.5m	25-75W	90°	150lm/w	1540	76	80
T06A58P/D/E/MS 90	1.5m	33-58W	90°	150lm/w	1540	76	80

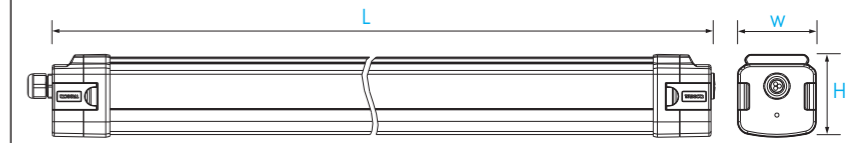

Model	Size	Power	Beam angle	Lumen efficiency	L	W	H
T06A35P/D/E/MS 120	0.6m	13-35W	120°	150lm/w	683	76	80
T06A62P/D/E/MS 120	1.2m	21-62W	120°	150lm/w	1253	76	80
T06A47P/D/E/MS 120	1.2m	27-47W	120°	150lm/w	1253	76	80
T06A71P/D/E/MS 120	1.5m	26-71W	120°	150lm/w	1540	76	80
T06A58P/D/E/MS 120	1.5m	33-58W	120°	150lm/w	1540	76	80



Model	Size	Power	Beam angle	Lumen efficiency	L	W	H
T06A32P/D/E/MS SA	0.6m	12-32W	SA25°	150lm/w	683	76	80
T06A62P/D/E/MS SA	1.2m	21-62W	SA25°	150lm/w	1253	76	80
T06A47P/D/E/MS SA	1.2m	27-47W	SA25°	150lm/w	1253	76	80
T06A75P/D/E/MS SA	1.5m	25-75W	SA25°	150lm/w	1540	76	80
T06A58P/D/E/MS SA	1.5m	33-58W	SA25°	150lm/w	1540	76	80



Model	Size	Power	Beam angle	Lumen efficiency	L	W	H
T06A32P/D/E/MS DA	0.6m	12-32W	DA25°	150lm/w	683	76	80
T06A62P/D/E/MS DA	1.2m	21-62W	DA25°	150lm/w	1253	76	80
T06A47P/D/E/MS DA	1.2m	27-47W	DA25°	150lm/w	1253	76	80
T06A75P/D/E/MS DA	1.5m	25-75W	DA25°	150lm/w	1540	76	80
T06A58P/D/E/MS DA	1.5m	33-58W	DA25°	150lm/w	1540	76	80

ACCESSORIES


Surface ceiling fixing

Model No: DMA001
kits Size :53*36*15mm
Thickness : 0.5mm spring steel



Steel cable suspension

Model No: DMA002
Steel cable suspension kits
length: 2 meter



Chain suspension

Model No: DMA003
Chain suspension kits
length: 2 meter



Input cable protector

Model No: DMA012S
IP 67 Waterproof joint
Material: Iron nickel plating



Input cable protector

Model No: DMA012
IP 67 Waterproof joint
Material: PC



Reducing valve

Model No: DMA015
For keeping internal and external
pressure balance
Material: PC



Adjustable angle bracket kit

Model No: DMA001ADP
For wall mounted
Material: Steel

